

Trimline 70 SL

BUILT-IN BALANCED FLUE GASFIRE



Discover the possibilities with the Trimline 70 SL

With an innovative, versatile design the compact Trimline 70 Slimline is easy to install and simple to service. The TL70SL can be wall mounted and installed directly to any internal outside facing wall. One of the biggest advantages is that there is minimal building work required and with an output of 3.8kW and an impressive efficiency rating of B, the Trimline 70 SL will fit perfectly with virtually all interiors with sleek lines for a contemporary living statement. The TL70SL utilises the same features as the other appliances within the range. The TL70SL is remotely operated and supplied with a battery box as powersupply.

Trimline 70 SL with Integrated Heat Box

When the TL70SL is installed with the Integrated Heat Box (IHB) it allows you to construct the installation from combustible materials making the fire a versatile choice in most modern building applications. The use of the integrated heat box allows the appliance to be installed in situations where combustible surfaces or materials would or may hinder the installation given the risk of heat and allows quicker access for service and maintenance.

- Easy to install and simple to service
- Can be fitted with the use of combustible materials* when installing with the IHB
- Slimline appliance only 155mm depth
- Can be wall mounted or installed within a suite
- Can be installed directly to any internal outside facing wall
- Energy class B - 84% efficient
- Can be installed into a cavity wall



- Realistic log effect
- Comes complete with battery box powersupply

* Please refer to installation instructions when fitting with or without the IHB.

Styling & Optionals

Ecomax remote control

For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.



Options interior finish materials and Trimline Wi-Fi control

For that extra WOW factor, there is also an option to upgrade to a black glass lining within the combustion chamber which offers a remarkable effect of added depth and detail. Other available upgrades also include Wi-Fi, vermiculite interior lining and alternative frame options.



STANDAARD Lamelas interior





OPTIONAL Vermiculite interior








OPTIONAL Black glass interior


Product specifications

FEATURES

-  Balanced flue gas fire
-  Front model
-  Single burner
-  Wood logs fuel bed
-  Ecomax remote control
-  Lamelas interior

OPTIONALS

-  Black glass interior
-  Vermiculite interior
-  Anti reflective glass
-  Mains adapter GV60
-  Wall bracket remote control
-  Domotica smart connection
-  Wall switch

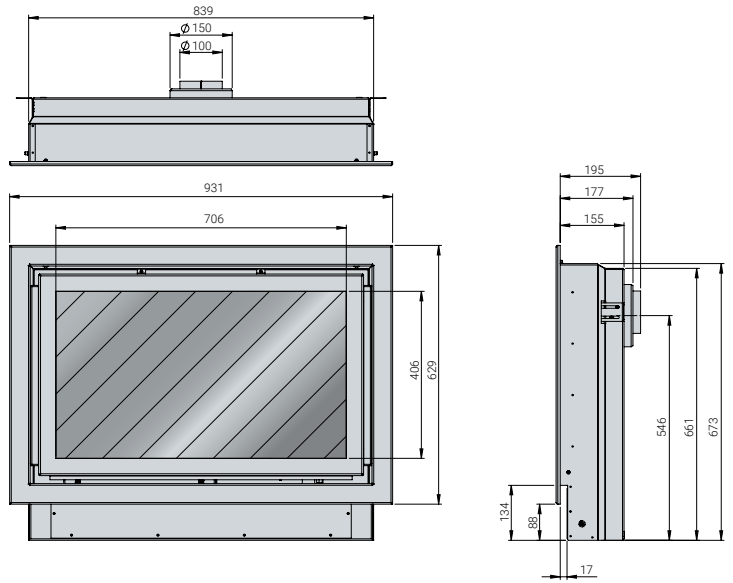

Appliance name	Trimline 70 SL		
Appliance type	Balanced flue build in gas fires (C11, C31, C91)		
Purpose	Ambient heating, real flames		
Engine identification	1023		
Gas type -pressure	Natural gas G25.3 – 25mbar	Natural gas G20 – 20mbar	LPG G30/31 – 28-50mbar
Heat input (kW)	4.7	4.5	4
Heat output max (kW)	4	3.8	3.3
Heat output min (kW)	2.7	2.8	2
Consumption (m ³ /h and kg/h LPG)	0.57	0.48	0.23
Efficiency in %	84	84	83
Flue lay out wall termination	Direct and indirect 1m vertical and max 4m horizontal		
Weight (kg)	65		
Efficiency class EN613	1		
Energy label EN613	B		
Energy label highest efficiency	B		
NOx class	5		
PIN ID CE	0461CT1099		
Gas connection	3/8" inside connection		
Electrical connection	6VDC battery-pack powered, optional 220VAC>6VDC power adapter		
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866mHz		
Safety	Thermocouple flame supervision and pressure hatches		
Heat distribution	Internal convection system		
Connectivity	Optional App control (Android and iOS), wallswitch and domotica connection		
Flue type and diameter	Holetherm-CC concentric flue, 100-150mm		
Standard supplied	8 button remote control – Log fuelbed – Glowing wool – Batterybox – Rilled interior panels		
Optional	Black glass interior panels – Vermiculite interior panels – IHB integrated Heat Box for combustible built-in		
Remarks	<ul style="list-style-type: none"> • Always use non-combustible construction materials such as metal stud framing and fireboard cladding • IHB Integrated Heat Box can be used if the fire will be built inside a wooden framing 		

Installation details

Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



Balanced flue gas fire

One of the most innovative aspects of the Trimline 70 SL is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.